






SYV[®]
design

FLOOD LIGHT

TECHNICAL DATA SHEET - AUGUSS - 14121 - FLOOD LIGHT

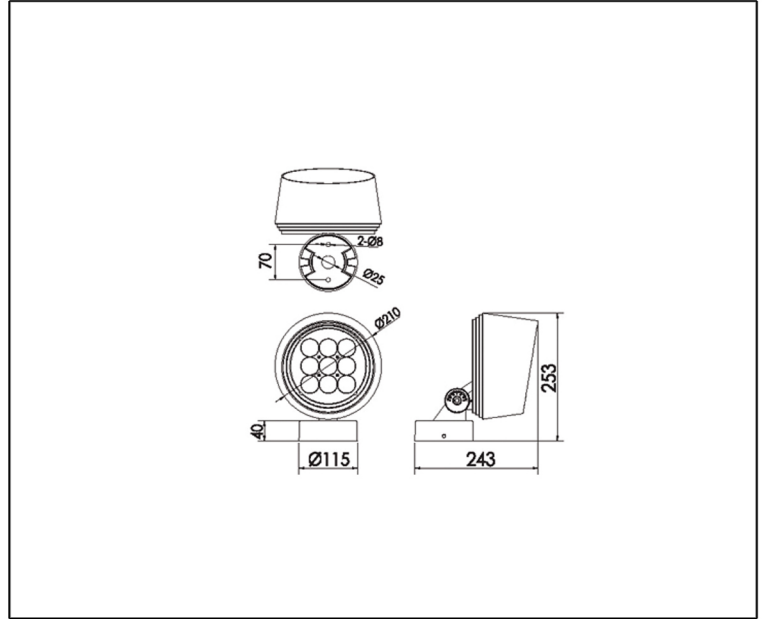

14121
 CREE LED
 Rated Luminaire Luminous Flux: 4275lm
 Rated input power: 45W
 Luminaire Efficiency: 95lm/W
 Input Voltage: AV90-265V



Product Description

The Auguss Floodlight, uniquely developed and engineered to incorporate the latest in LED technology and design. It saves energy consumption and prevent the temperature from being too high, thus lengthened the lifespan.

Technical Data

| | |
|-------------------------------|---------------------------------|
| Product Data | Flood Light |
| Wattage | 45W |
| Color Temperature | 3000K |
| Rated Luminaire Luminous Flux | 4275lm |
| IP Rating | 66 |
| Beam Angle | 30° |
| Frequency Range | 50-60Hz |
| CRI | Ra>80 |
| Power Factor | >0.9 |
| Material | Die Cast Aluminium body |
| Finish | Grey |
| Life Span | 50,000Hrs |
| Warranty | 5 Years |
| Applications | Commercial, Hospitality, Retail |

Options

| | |
|-------------------|---------------------|
| Wattage | 45W, 35W |
| Color Temperature | 3000K - 6000K, RGB |
| Beam Angle | 3.5°, 12°, 20°, 30° |