




The logo for SYV design, featuring the letters 'SYV' in a large, bold, white sans-serif font. Below the letters, the word 'design' is written in a smaller, lowercase, white sans-serif font. A registered trademark symbol (®) is located at the top right of the 'V'.A photograph of a stone building at night. The building has several tall, narrow stone pillars and a stone wall. The interior lights are on, and the windows are illuminated. In the foreground, there is a grassy area with two black bollards that are illuminated from within, casting a warm glow. The background shows a dark, rocky hillside and a small white building with lights on in the distance.

BOLLARD & PATHWAY
LUMINAIRE

TECHNICAL DATA SHEET - NORAY - 14624 - BOLLARD & PATHWAY LUMINAIRE

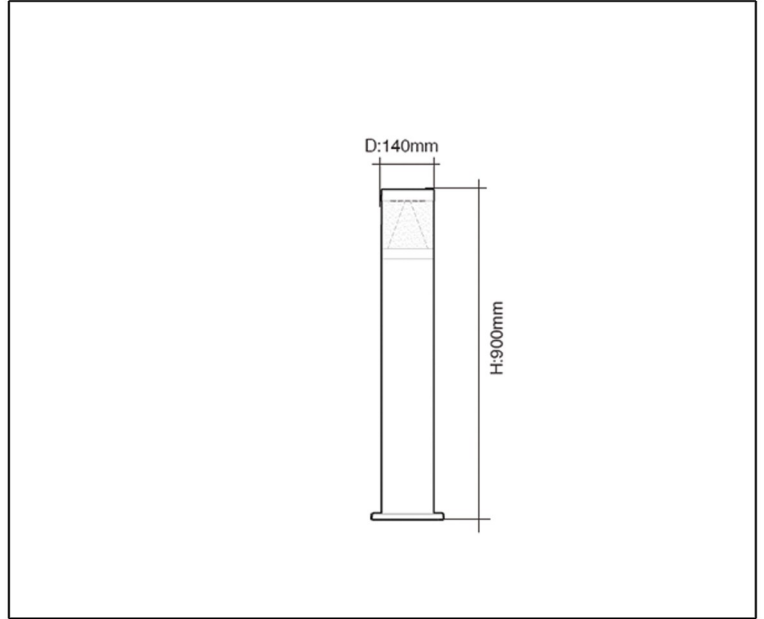

14624
 SAMSUNG LED
 Rated Luminaire Luminous Flux: 800lm
 Rated input power: 8W
 Luminaire Efficiency: 100lm/W
 Input Voltage: 90-260V



Product Description

Noray lights can become a featured addition to illuminate and accent landscaping, walkways, buildings and parking areas. They add ambient lighting to property; improve security by increasing visibility and mark pathways and driveways.

Technical Data

Product Data	Bollard & Pathway Luminaire
Wattage	8W
Color Temperature	3000K
Rated Luminaire Luminous Flux	800lm
IP	65
Beam Angle	120°
Frequency Range	50-60Hz
CRI	Ra>80
Power Factor	>0.9
Material	Aluminium + Clear Polycarbonate Diffuser
Finish	Matt black UV-proof powder coating
Life Span	50,000Hrs
Warranty	5 Years
Applications	Commercial, Residential

Options

Color Temperature	4000K, 6000K
Finish	Dark Grey / Silver / White / Rust