



**SYV**<sup>®</sup>  
design


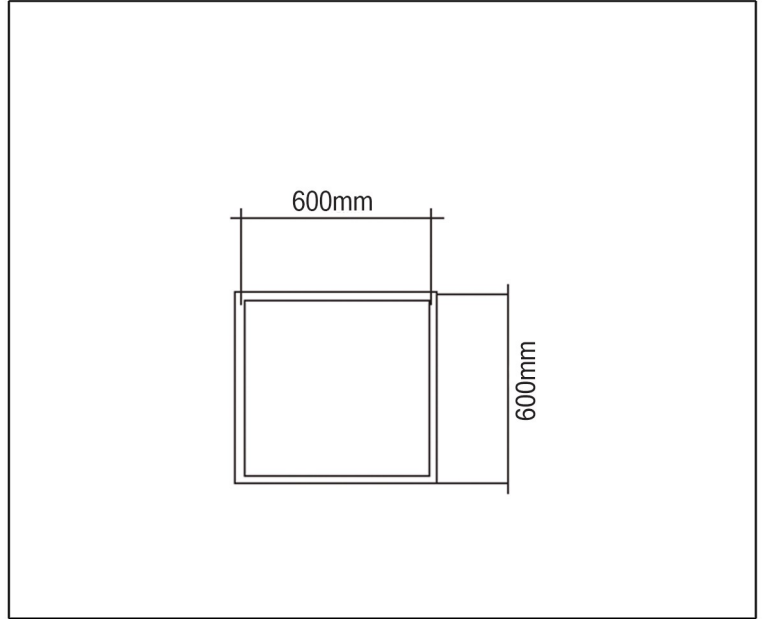


PANEL LIGHT

## TECHNICAL DATA SHEET - ERLICH PRO - 14292 - PANEL LIGHT

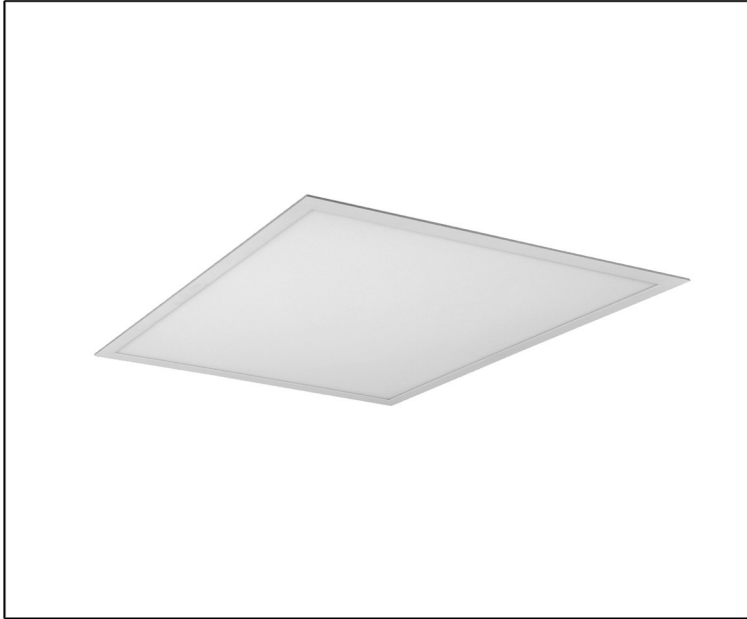

14292  
 SAMSUNG LED  
 Rated Luminaire luminous flux: 4000lm  
 Rated input power: 40W  
 Luminaire efficiency: 100lm/w  
 Input voltage: AC220-240V



### Product Description

Erlich is made up of high efficiency light guide plate, good effect diffusion plate, high quality and good design aluminium frame. This commercial LED panel Light fittings is perfect for use in Offices, Task Lighting, Store displays, Warehouse Illumination and much more. This LED Dunne proceed with oxidation which can enhance panel light's beauty, high efficiency light guide plate and side emitting light way leads to ultra-soft and uniform light.

### Technical Data

Product Data	Panel Light
Wattage	40W
Color Temperature	6000K
Rated Luminaire Luminous Flux	4000lm
IP Rating	44
Beam Angle	120°
Current	1000mA
Frequency Range	50-60Hz
CRI	Ra>80
Power Factor	>0.9
Material	Aluminium Body + Stainless Steel cover
Finish	White
Life Span	30,000Hrs
Warranty	3 Years
Applications	Residential, Commercial, Hospitality, etc.

### Options

Wattage	26W, 36W, 40W
Color Temperature	3000K, 4000K, 6000K
Dimmable	Dali, 0-10V, 1-10V, TRIAC, Others

