






RECESSED DOWNLIGHT

TECHNICAL DATA SHEET - BULAR 30 DL - 14786 - RECESSED DOWNLIGHT

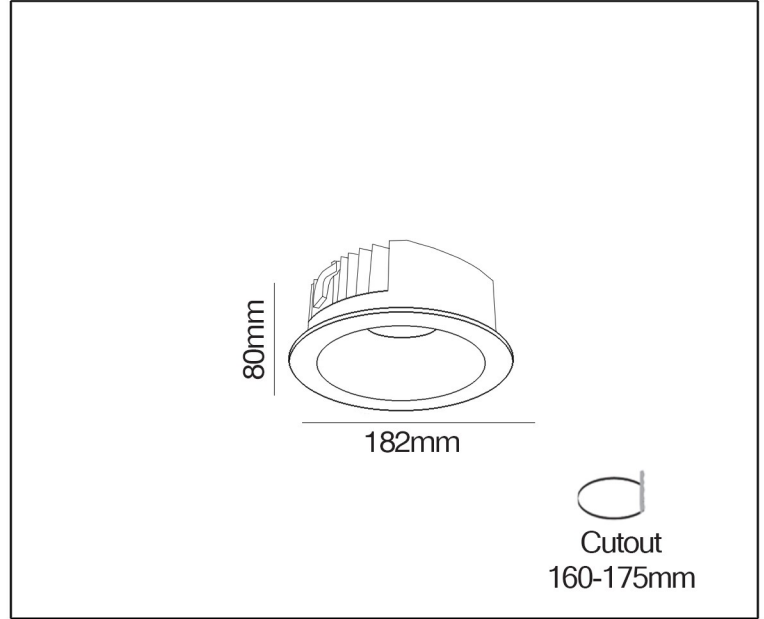

14786
CITIZEN LED
Philips Driver
Rated Luminaire Luminous Flux: 2550lm
Rated input power: 30W
Luminaire efficiency: 85lm/w
Input voltage: AC200-240V



Product Description

Bular Downlight comes with high quality and efficiency. The Bular Series maximizes energy savings for commercial & residential applications. Designed with versatility in mind, these are available in warm or daylight color temperatures with a dimmable option.

Technical Data

Product Data	Recessed Downlight
Wattage	30W
Color Temperature	6000K
Rated Luminaire Luminous Flux	2550lm
IP Rating	44
Beam Angle	60°
Frequency Range	50-60Hz
CRI	Ra>80/90
Power Factor	>0.9
Material	Aluminum with Powder coated surface
Finish	White + Iron Gray
Life Span	30,000Hrs
Warranty	3 Years
Applications	Residential, Commercial, Retail, etc.

Options

Color Temperature	3000K-4000K
Dimmable	TRIAC, 1-10V, 0-10V, DALI