



SYV[®]
design



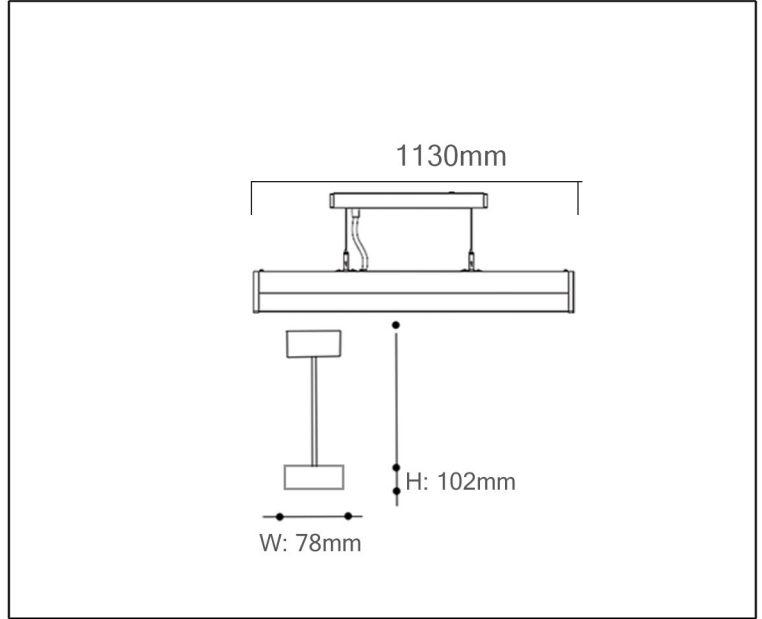


SUSPENDED MOUNTED LIGHT

TECHNICAL DATA SHEET - DIDO WH - 14848 - SUSPENDED MOUNTED LIGHT

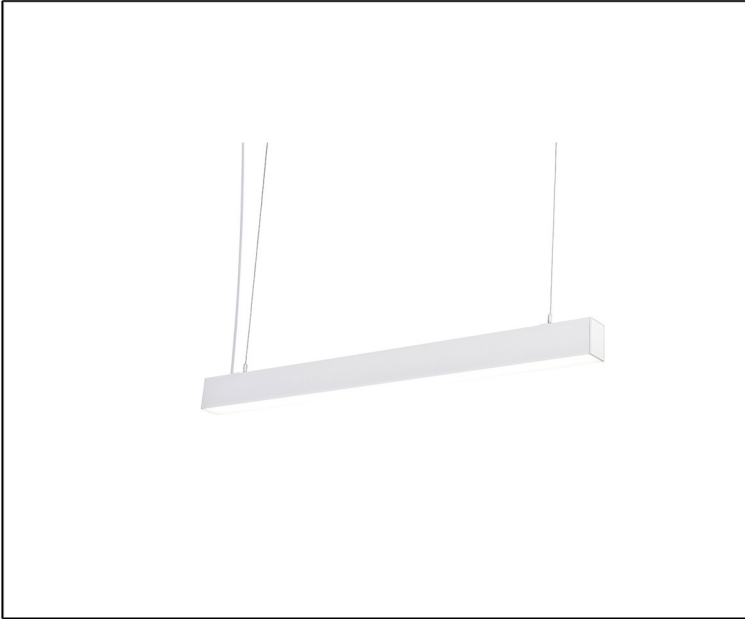

14848
 SAMSUNG LED
 OSRAM Driver
 Rated Luminaire luminous flux: 4,050lm
 Rated input power: 45W
 Luminaire efficiency: 90lm/W
 Input voltage: 220-240V



Product Description

Dido series architectural linear led suspended fixture bring clean lines and clear light to commercial LED or residential lighting interiors. Our sleek, stylish fixtures are highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more. Our Linear Lights are a stylish alternative to downlights. Linear lights can create a functional yet relaxing atmosphere and provide an even wash of light within a space.


Technical Data

Product Data	Suspended Mounted Light
Wattage	45W
Color Temperature	4000K
Rated Luminaire luminous flux	4,050lm
IP Rating	20
Frequency Range	50-60Hz
CRI	>80
Power Factor	>0.9
Material	Aluminium Profile + PMMA Diffuser
Finish	Matt White
Life Span	50,000Hrs
Warranty	5 Years
Applications	Hospitality, Commercial, etc.

Options

Wattage	15W, 22W, 30W, 40W
Color Temperature	3000K - 6000K
Finish	Yellow, Green, Orange, Black

Lux-Distance Curve

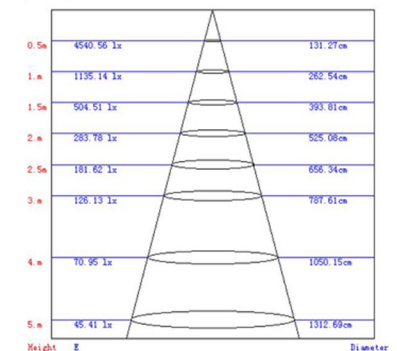

Beam Angle: 105.40°

Light Distribution Curve [Unit: cd]

