







RECESSED SPOTLIGHT

TECHNICAL DATA SHEET - DITA 3 - 14936 - RECESSED SPOT LIGHT

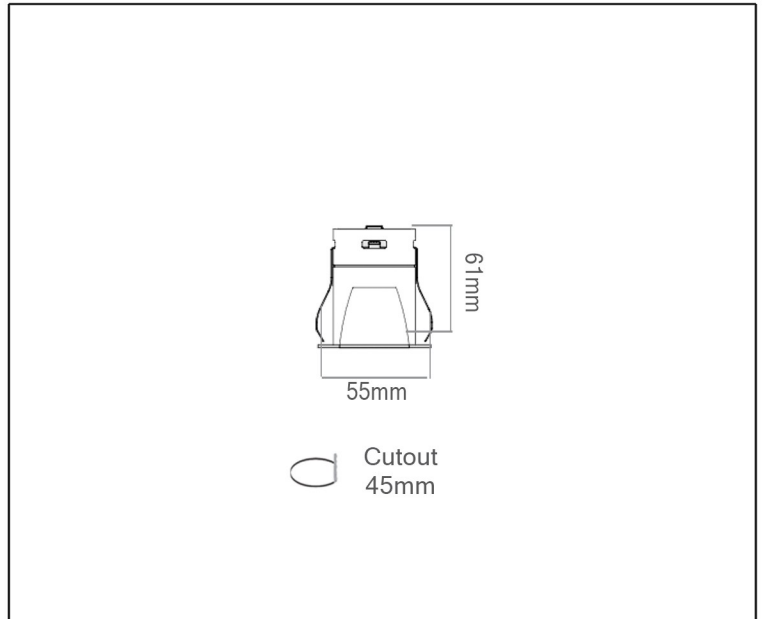

14936
 CREE LED
 Rated Luminaire Luminous Flux: 175lm
 Rated input power: 3W
 Luminaire efficiency: 58lm/w
 Input voltage: AC200-240V



Product Description

A high performance extremely compact spotlight. Small size, high performance, rich light chromaticity and excellent colour distribution, Dita optic acts as a recessed projector for decorative accent lighting.

Technical Data

Product Data	Recessed Spot light
Wattage	3W
Color Temperature	3000K
Rated Luminaire Luminous Flux	175lm
IP Rating	20
Beam Angle	15°
Frequency Range	50-60Hz
CRI	Ra>80/90
Power Factor	>0.9
Material	Die Cast Aluminium
Finish	Black/Grey
Life Span	30,000Hrs
Warranty	3 Years
Applications	Residential, Hospitality, Retail, etc.

Options

Color Temperature	3000K, 4000K
Beam Angle	10°
Finish	Titanium, White