



**SYV**<sup>®</sup>  
design


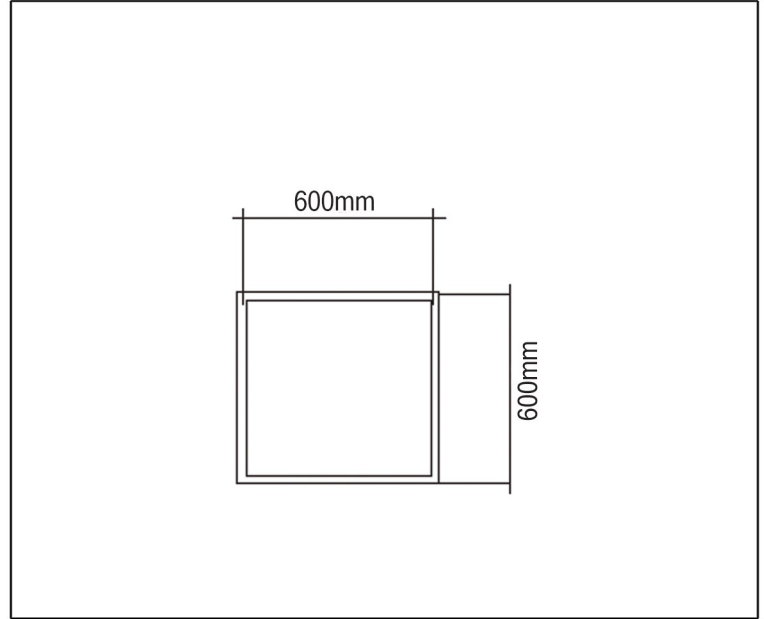


PANEL LIGHT

## TECHNICAL DATA SHEET - ERLICH NW - 14466 - PANEL LIGHT

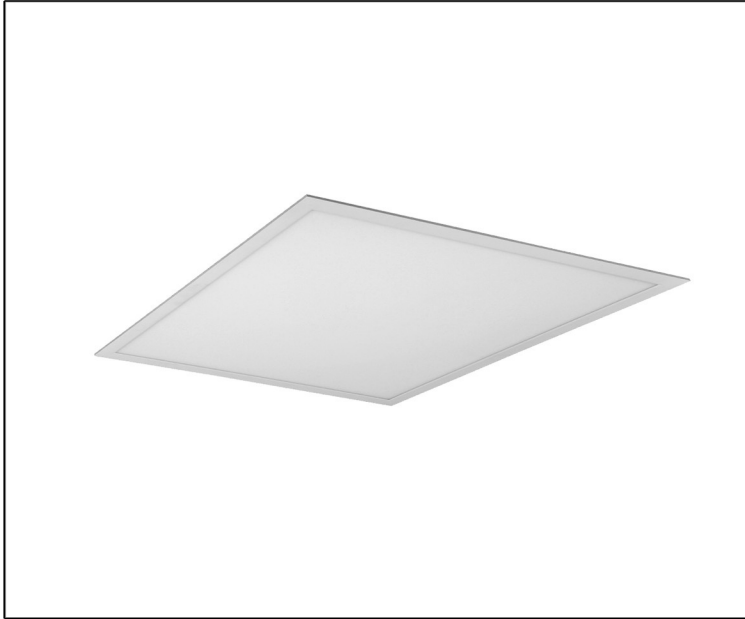

14466  
 EPISTAR LED  
 Rated Luminaire luminous flux: 3600lm  
 Rated input power: 40W  
 Luminaire efficiency: 90lm/w  
 Input voltage: AV180-260V



### Product Description

Erlich is made up of high efficiency light guide plate, good effect diffusion plate, high quality and good design aluminium frame. This commercial LED panel Light fittings is perfect for use in Offices, Task Lighting, Store displays, Warehouse Illumination and much more. This LED Dunne proceed with oxidation which can enhance panel light's beauty, high efficiency light guide plate and side emitting light way leads to ultra-soft and uniform light.

### Technical Data

| Product Data                  | Panel Light                                |
|-------------------------------|--|
| Wattage                       | 40W  |
| Color Temperature             | 4000K                                      |
| Rated Luminaire Luminous Flux | 3600lm                                     |
| IP Rating                     | 44   |
| Beam Angle                    | 120°                                       |
| Current                       | 1000mA                                     |
| Frequency Range               | 50-60Hz                                    |
| CRI                           | Ra>80                                      |
| Power Factor                  | >0.9                                       |
| Material                      | Aluminium Body + Stainless Steel cover     |
| Finish                        | White                                      |
| Life Span                     | 30,000Hrs                                  |
| Warranty                      | 3 Years                                    |
| Applications                  | Residential, Commercial, Hospitality, etc. |

### Options

|                   |                                   |
|-------------------|-----------------------------------|
| Wattage           | 26W, 36W, 40W                     |
| Color Temperature | 3000K, 4000K, 6000K               |
| Dimmable          | Dali, 0-10V, 1-10V, TRIAC, Others |

