






RECESSED DOWNLIGHT

## TECHNICAL DATA SHEET - LUZTRADA 10 - 14579 - RECESSED DOWNLIGHT

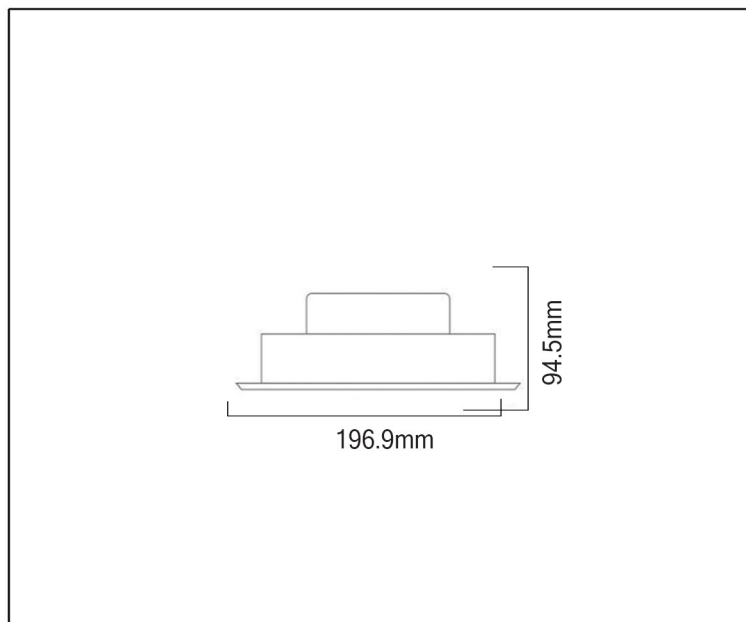

14579  
LED  
Rated Luminaire luminous flux: 480lm  
Rated input power: 10W  
Luminaire efficiency: 48lm/w  
Input voltage: 220-240V

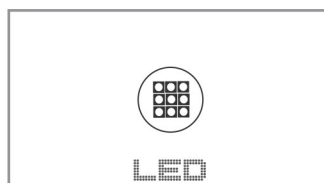

### Product Description

Luztrada is one of a kind recessed lights with integrated design & in built driver, high transparency quality that has high lighting output affect as well as coating of nano spray technology.

### Technical Data

Product Data	Recessed Downlight
Wattage	10W
Color Temperature	3000K
Rated Luminaire Luminous Flux	480lm
IP Rating	54
Beam Angle	90°
Current	260mA
Frequency Range	50-60Hz
CRI	Ra>90
Power Factor	>0.9
Material	Die Cast Aluminium + PMMA Diffuser
Finish	White
Life Span	30,000Hrs
Warranty	3 Years
Applications	Residential, Commercial, Retail, etc.

### Options

Color Temperature	3000K, 4000K, 6000K
Finish	White, Silver, Chrome

1.0	300.11	60.4/207.9lx
2.0	600.22	15.1/51.98lx
3.0	900.33	6.71/23.10lx
4.0	1200.44	3.77/13.00lx
5.0	1500.55	2.41/8.317lx

Distance(m) Cone Diameter [cm] Illuminance [lx]  
— C0 - C180

