




RECESSED DOWNLIGHT

TECHNICAL DATA SHEET - LUZTRADA 20 - 14580 - RECESSED DOWNLIGHT

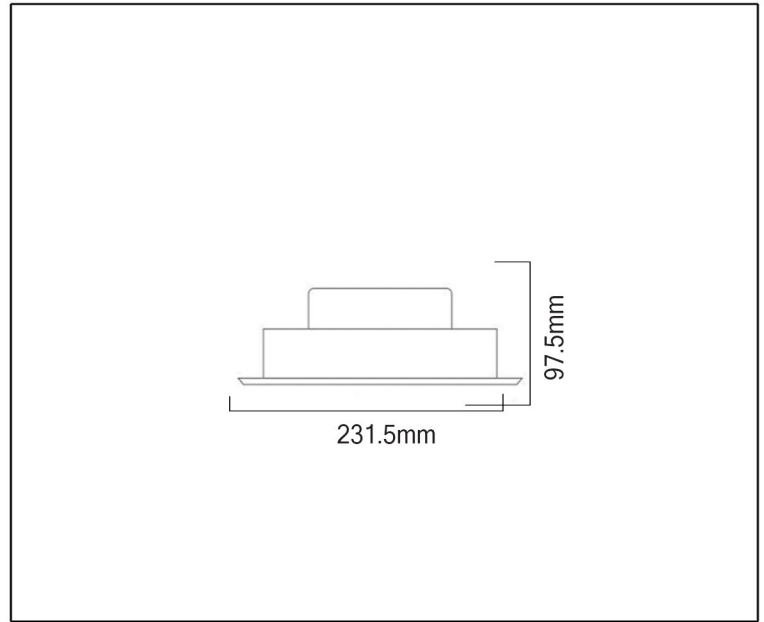

14580
LED
Rated Luminaire luminous flux: 1300lm
Rated input power: 20W
Luminaire efficiency: 65lm/w
Input voltage: 220-240V



Product Description



Luztrada is one of a kind recessed lights with integrated design & in built driver, high transparency quality that has high lighting output affect as well as coating of nano spray technology.

Technical Data

Product Data	Recessed Downlight
Wattage	20W
Color Temperature	3000K
Rated Luminaire Luminous Flux	1300lm
IP Rating	54
Beam Angle	90°
Current	260mA
Frequency Range	50-60Hz
CRI	Ra>90
Power Factor	>0.9
Material	Die Cast Aluminium + PMMA Diffuser
Finish	White
Life Span	30,000Hrs
Warranty	3 Years
Applications	Residential, Commercial, Retail, etc.

Options

Color Temperature	3000K, 4000K, 6000K
Finish	White, Silver, Chrome



1.0	300.11	60.4/207.9lx
2.0	600.22	15.1/51.98lx
3.0	900.33	6.71/23.10lx
4.0	1200.44	3.77/13.00lx
5.0	1500.55	2.41/8.317lx

Distance(m) Cone Diameter (cm) Illuminance (lx)
— C0 - C180

