



**SYV**<sup>®</sup>  
design



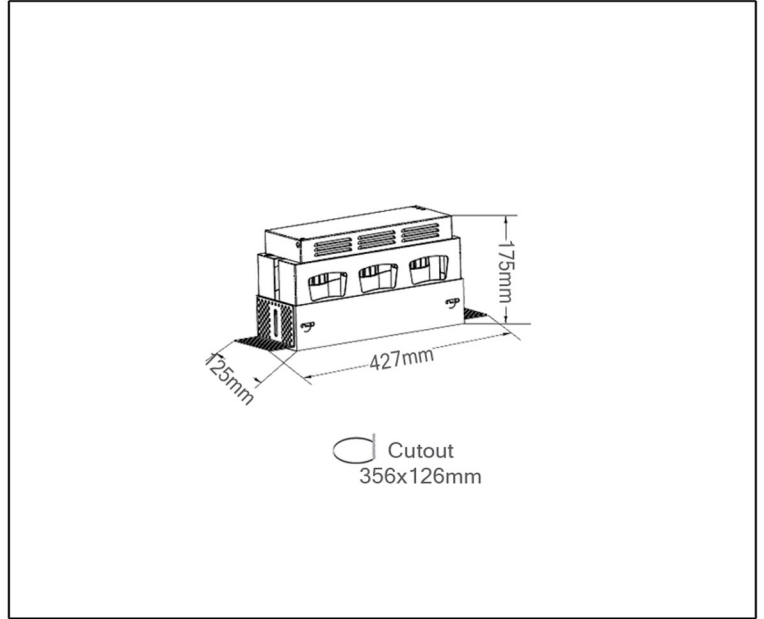


RECESSED DOWNLIGHT

## TECHNICAL DATA SHEET - REJILA 3 - 14920 - RECESSED DOWNLIGHT

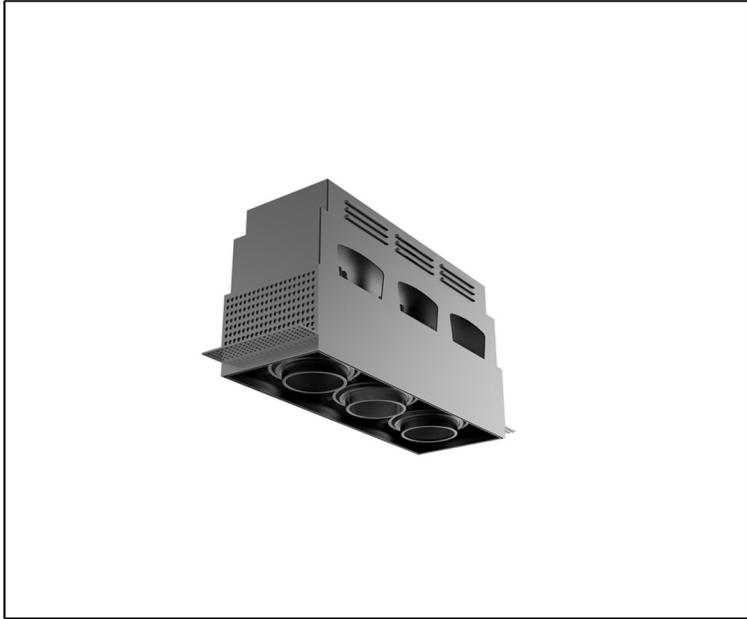

14920  
 PHILIPS LED  
 Rated Luminaire Luminous Flux: 5850lm  
 Rated input power: 3 x 30W  
 Luminaire efficiency: 65lm/W  
 Input voltage: AC200-240V



### Product Description

LED grille light has single head, double heads and tri-heads lamp with die-casting aluminum and heat dissipation, it is covered with frame that makes installation easy, steady and convenient. Multiple wattages, sizes and beam angles are available along with dimming options

### Technical Data

Product Data	Recessed Downlight
Wattage	3 x 30W
Color Temperature	3000K
Rated Luminaire Luminous Flux	5850lm
IP Rating	20
Beam Angle	30°
Frequency Range	50-60Hz
CRI	Ra>80/90
Power Factor	>0.9
Material	Aluminum with Powder coated surface
Finish	Black + Iron Grey
Life Span	30,000Hrs
Warranty	3 Years
Applications	Residential, Commercial, Retail, etc.

### Options

Wattage	30W, 60W
Beam Angle	15°/20°/36°/45°
Color Temperature	2700K-5000K
Dimmable	TRIAC
Finish	White+Iron gray/Iron gray