


SYV[®]




RECESSED DOWNLIGHT

TECHNICAL DATA SHEET - SONNE R PRO DL - 13901 - RECESSED DOWNLIGHT

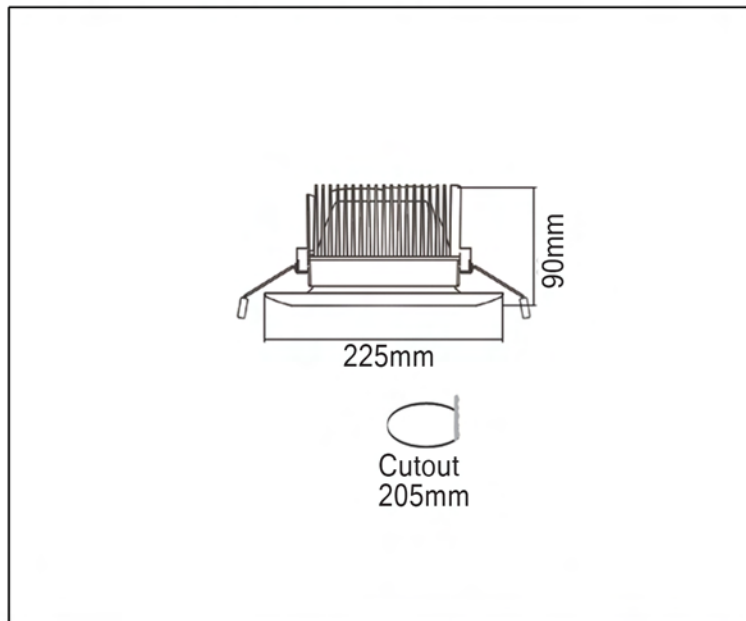

13901
CREE LED
Rated Luminaire luminous flux: 3305lm
Rated input power: 38W
Luminaire efficiency: 87lm/w
Input voltage: 220-240V



Product Description

The future of downlighting is looking up. The German design of Sonne R PRO with LEDs takes an ambient lighting to a whole new dimension. Compact, powerful LED offer an instant on solution, dynamic color tuning, directional light, and environmentally friendly energy efficiency. It can be used widely for general ambient lighting in homes, offices and public facilities.

Technical Data

Product Data	Recessed Downlight
Wattage	38W
Color Temperature	5000K
Rated Luminaire Luminous Flux	3305lm
IP Rating	54
Beam Angle	55°
Current	900mA
Frequency Range	50-60Hz
CRI	Ra>80
Power Factor	>0.9
Material	Pure Aluminium
Finish	White
Life Span	30,000Hrs
Warranty	3 Years
Applications	Residential, Commercial, Retail, etc.

Options

Wattage	15W, 20W, 25W, 30W, 40W
Color Temperature	3000K, 4000K, 6000K
Dimmable	Dali, 0-10V, 1-10V, TRIAC, Others

