


SYV<sup>®</sup>





RECESSED DOWNLIGHT



## TECHNICAL DATA SHEET - SONNE R PRO WW - 14106 - RECESSED DOWNLIGHT

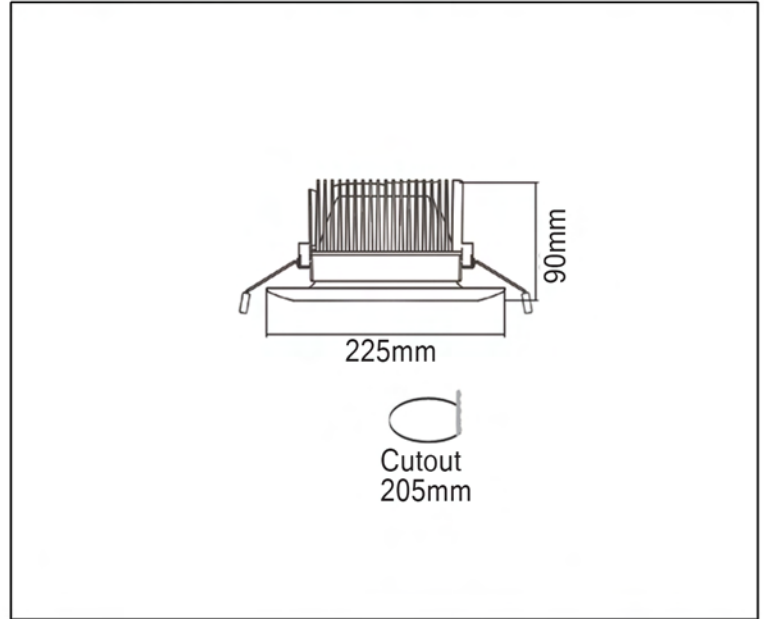

14106  
CREE LED  
Rated Luminaire luminous flux: 3257lm  
Rated input power: 38W  
Luminaire efficiency: 85lm/w  
Input voltage: 220-240V



### Product Description

The future of downlighting is looking up. The German design of Sonne R PRO with LEDs takes an ambient lighting to a whole new dimension. Compact, powerful LED offer an instant on solution, dynamic color tuning, directional light, and environmentally friendly energy efficiency. It can be used widely for general ambient lighting in homes, offices and public facilities.

### Technical Data

|                               |                                       |
|-------------------------------|---------------------------------------|
| Product Data                  | Recessed Downlight                    |
| Wattage                       | 38W                                   |
| Color Temperature             | 3000K                                 |
| Rated Luminaire Luminous Flux | 3257lm                                |
| IP Rating                     | 54                                    |
| Beam Angle                    | 55°                                   |
| Current                       | 900mA                                 |
| Frequency Range               | 50-60Hz                               |
| CRI                           | Ra>80                                 |
| Power Factor                  | >0.9                                  |
| Material                      | Pure Aluminium                        |
| Finish                        | White                                 |
| Life Span                     | 30,000Hrs                             |
| Warranty                      | 3 Years                               |
| Applications                  | Residential, Commercial, Retail, etc. |

### Options

|                   |                                   |
|-------------------|-----------------------------------|
| Wattage           | 15W, 20W, 25W, 30W, 40W           |
| Color Temperature | 3000K, 4000K, 6000K               |
| Dimmable          | Dali, 0-10V, 1-10V, TRIAC, Others |

