


**SYW**<sup>®</sup>  
design



BOLLARD & PATHWAY  
SOLAR LUMINAIRE

## TECHNICAL DATA SHEET - CUDAR - 14804 - BOLLARD AND PATHWAY SOLAR LUMINAIRE

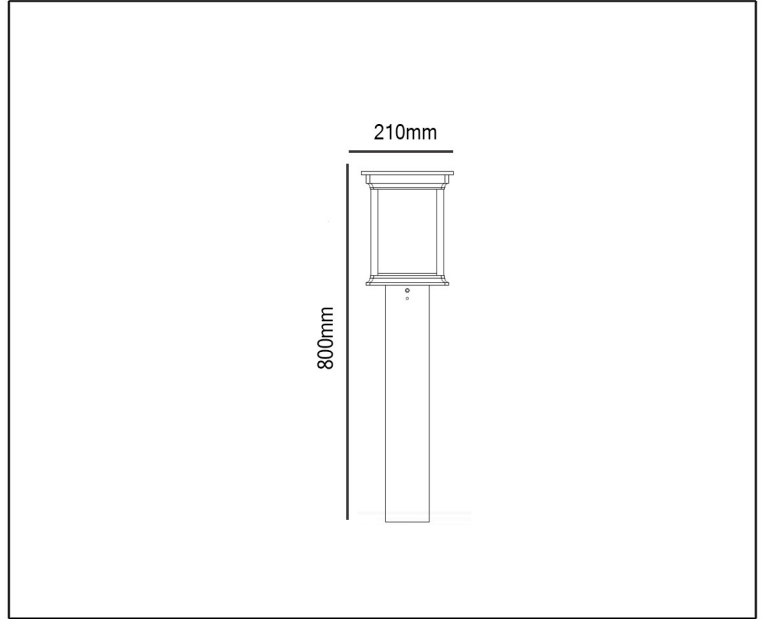

14804  
 LED  
 Rated Luminaire luminous flux: 400lm  
 Rated input power: 3.5W  
 Luminaire efficiency: 114lm/w  
 Input voltage: 220-240V



### Product Description

The solar Cudar bollard light has a very unique design. It can be quickly and easily installed almost anywhere. Ideal for walkways, parking lots, public areas, sidewalks etc.

### Technical Data

Product Data	Bollard and Pathway Solar Luminaire
Wattage	3.5W
Color Temperature	3000K
Rated Luminaire Luminous Flux	400lm
IP Rating	65
Frequency Range	50-60Hz
CRI	Ra>80
Power Factor	>0.9
Battery	4.5 AH 6.4V Lithium LifeP04
Charging	6 Hours / Day
Working Temperature	-15° + 65°
Material	Die Cast Aluminium
Finish	Black
Life Span	50,000Hrs
Warranty	5 Years
Applications	Residential, Commercial, Industrial, etc.