


**SYV**<sup>®</sup>  
design



BOLLARD & PATHWAY  
SOLAR LUMINAIRE

## TECHNICAL DATA SHEET - MURAL - 14818 - BOLLARD AND PATHWAY SOLAR LUMINAIRE

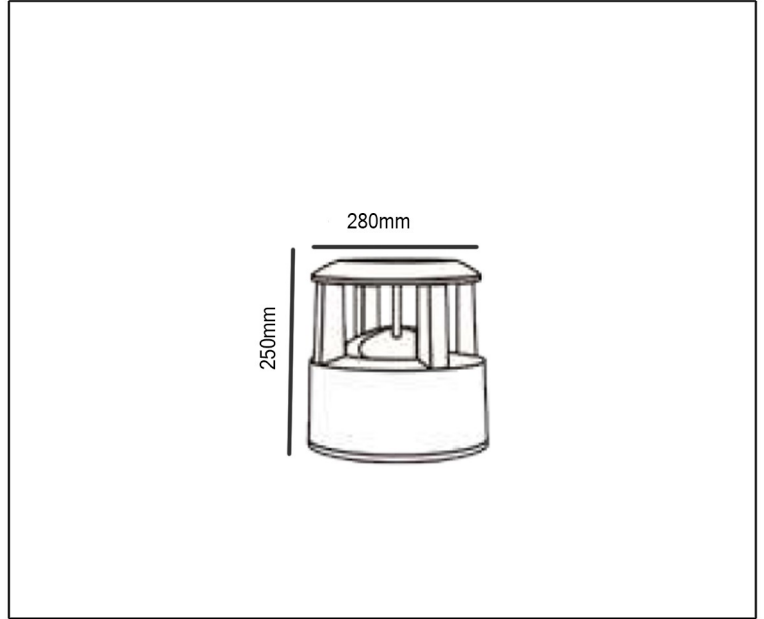

14818  
 LED  
 Rated Luminaire luminous flux: 250lm  
 Rated input power: 1.8W  
 Luminaire efficiency: 138lm/w  
 Input voltage: 220-240V



### Product Description

The Mural bollard light systems from dusk to dawn operation and is useful for pathway lighting, gardens, etc.

### Technical Data

Product Data	Bollard and Pathway Solar Luminaire
Wattage	1.8W
Color Temperature	3000K
Rated Luminaire Luminous Flux	250lm
IP Rating	65
Frequency Range	50-60Hz
CRI	Ra>80
Power Factor	>0.9
Battery	4.5 AH 6.4V Lithium LifeP04
Charging	6 Hours / Day
Working Temperature	-15° + 65°
Material	Die Cast Aluminium
Finish	Black
Life Span	50,000Hrs
Warranty	5 Years
Applications	Residential, Commercial, Industrial, etc.