




BOLLARD & PATHWAY
SOLAR LUMINAIRE

TECHNICAL DATA SHEET - PIROCHO - 14809 - BOLLARD AND PATHWAY SOLAR LUMINAIRE

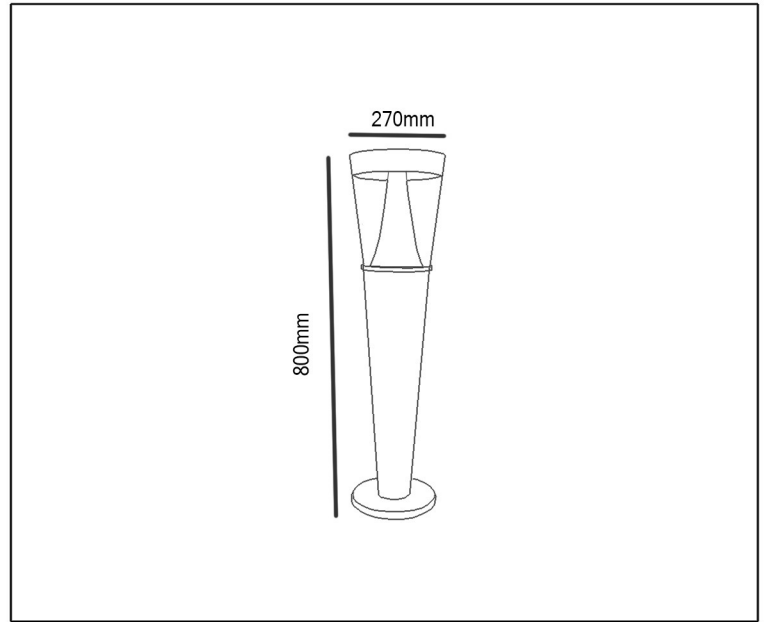

14809
LED
Rated Luminaire luminous flux: 425lm
Rated input power: 3W
Luminaire efficiency: 142lm/w
Input voltage: 220-240V



Product Description

Our Pirocho Solar Bollard Light is excellent as an area light, parking lot light, patio light or yard light. Pirocho features a fully enclosed, intelligent LED lighting systems to maximize outdoor illumination.

Technical Data

Product Data	Bollard and Pathway Solar Luminaire
Wattage	3W
Color Temperature	3000K
Rated Luminaire Luminous Flux	425lm
IP Rating	65
Frequency Range	50-60Hz
CRI	Ra>80
Power Factor	>0.9
Battery	4.5 AH 6.4V Lithium LifeP04
Charging	6 Hours / Day
Working Temperature	-15° + 65°
Material	Die Cast Aluminium
Finish	Black
Life Span	50,000Hrs
Warranty	5 Years
Applications	Residential, Commercial, Industrial, etc.